


- T20 2.38" ϕ x 4.00" TALL
- T25 2.88" ϕ x 4.00" TALL
- T30 3.50" ϕ x 6.00" TALL
- T35 4.00" ϕ x 6.00" TALL
- OT OPEN TOP
- TSP SPECIAL SIZE TENON

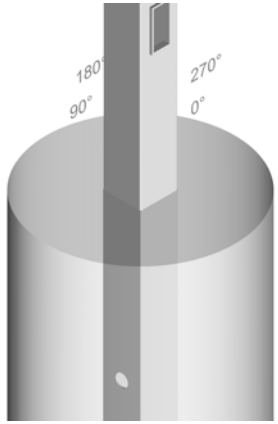

PROJECT NAME:	TYPE:
QUOTE / ORDER No:	
APPROVED BY:	DATE:

SPECIFICATIONS

POLE SHAFT:
The pole shaft is fabricated from hot rolled commercial quality carbon steel of one piece construction with a minimum yield strength of 55,000 psi.

EMBED:
WIRE WAY 1.00" ϕ ACCESS 24" BELOW GROUND LINE. MASTIC COATING AVAILABLE FOR ADDITIONAL PROTECTION OF EMBEDDED POLE.

HANDHOLE:
A reinforced hand hole, having a nominal opening of 2.5"x 5" will be installed 18" above the base plate. A hand hole cover with hardware will be included along with grounding provisions.

POLE TOP:
Each pole will be provided with a welded top plate and tenon or top cap for poles receiving drilling for side mount fixtures.

FINISH:
Standard color finishes shall be coated with TGIC polyester powder or hot dip galvanized to ASTM A-123 specifications.

(SNS-DE) Square Straight-Direct Embed	POLE DIMENSIONS					EMBED DETAIL			ALLOWABLE MAX EPA ² & WEIGHT (lbs)															
	HGT (FT)	Base OD (in)	Top OD (in)	Wall Thk (GA)	Structure Weight (lbs)	MOUNT HEIGHT	EMBED LENGTH	OVERALL LENGTH	80 MPH		90 MPH		100 MPH		110 MPH		120 MPH		130 MPH		140 MPH		150 MPH	
									EPA	WGT	EPA	WGT	EPA	WGT	EPA	WGT	EPA	WGT	EPA	WGT	EPA	WGT	EPA	WGT
ALP CATALOG #																								
SNS-10-40-11-DE	10	4.00	4.00	11	92	10'-0"	4'-0"	14'-0"	29.0	725	22.0	550	17.0	425	14.0	350	11.0	275	9.0	225	8.0	200	6.0	150
SNS-15-40-11-DE	15	4.00	4.00	11	125	15'-0"	4'-0"	19'-0"	18.0	450	14.0	350	11.0	275	8.0	200	6.0	150	4.0	100	3.0	75	2.0	50
SNS-20-40-11-DE	20	4.00	4.00	11	170	20'-0"	5'-0"	25'-0"	11.0	275	8.0	200	5.0	125	3.0	75	2.0	50	1.0	25	-	-	-	-
SNS-25-40-7-DE	25	4.00	4.00	7	287	25'-0"	5'-0"	30'-0"	13.0	325	9.0	225	6.0	150	4.0	100	2.0	50	1.0	25	-	-	-	-
SNS-30-50-7-DE	30	5.00	5.00	7	422	30'-0"	5'-0"	35'-0"	17.0	425	12.0	300	7.0	175	4.0	100	2.0	50	-	-	-	-	-	-
SNS-33-60-7-DE	33	6.00	6.00	7	568	33'-0"	6'-0"	39'-0"	23.0	575	16.0	400	10.0	250	6.0	150	3.0	75	1.0	25	-	-	-	-

ORDERING CODE	CATALOG No.	BASE	FINISH	FIXTURE MOUNT	OPTIONS	OPTIONS
		DE- DIRECT EMBED	DB-DARK BRONZE MB-MEDIUM BRONZE WH-WHITE BL-BLACK LG-LIGHT GRAY SM-SILVER METALLIC SL-SILVER HG-HUNTER GREEN RD-RED G-GALVANIZED GPXX-PAINTED OVER GALV	D19 D28 D29 D32 D39 D49 T20 T25 T30 T35 OT TSP-ADVISE TC- TOP CAP ONLY	XHH-EXTRA HANDHOLE FES-FESTOON (GFI BY OTHERS) DMP-VIBRATION DAMPER CP50-.50" COUPLING CP75-.75" COUPLING CP10-1.00" COUPLING CP20-2.00" COUPLING NP50-.50" NIPPLE NP75-.75" NIPPLE NP10-1.00" NIPPLE MBP-MODIFIED BASE PLATE	