


Accessories - Transformer Bases

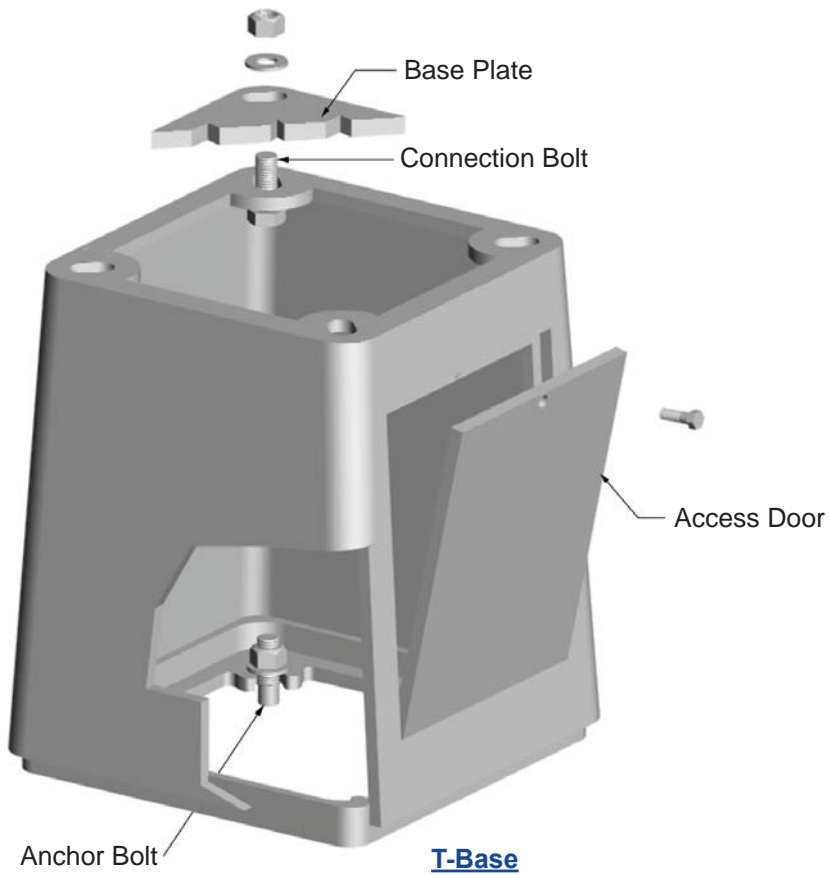

Catalog Number	Maximum Lum Mtg. Height (ft)	Maximum Applied Weight (lbs)	Bottom Bolt Circle range (in)	Top Bolt Circle range (in)	Maximum Anchor Bolt Diameter (in)	Maximum Top Connecting Bolt Diameter (in)
TB1	55	950	14 - 15	12 - 13.5	1.00	1.00
TB2	40	550	10 - 12	10 - 12	1.00	1.00
TB3	55	900	15 - 17.25	13 - 15.125	1.25	1.25

Use leveling shims with all transformer bases. DO NOT USE LEVELING NUTS. Consult factory for loading capacities and applicability of use.